


CHICAGO FITTINGS X-RISER



FEATURES AND BENEFITS

- **No Underground Joints:** One solid service line with above ground terminations.
- **No Camfering:** A simple clean cut is all that is required.
- **Bi-Directional Seal:** Assembly cannot be installed improperly.
- **No Torque Requirements:** Simply tighten the compression nut until it is metal-to-metal.
- **Simple Design:** Can be installed with a flat jaw wrench extending the life of the protective coating.
- **Integral Barbed Stiffeners:** Permanent for additional pull out resistance.
- **Quality:** Machined from solid bar stock with the most precise threads and design flexibility.

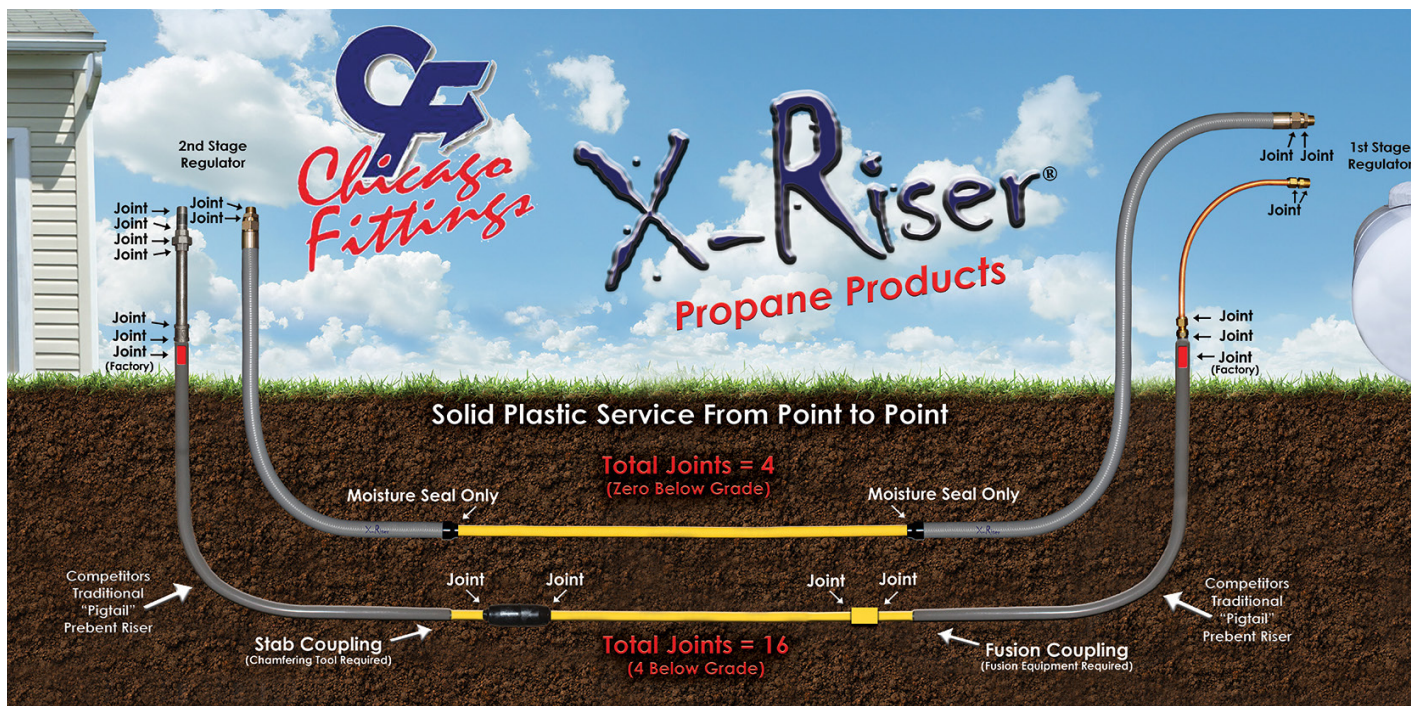

PART NUMBER	DESCRIPTION
LP-XR-10B-12-36-L-ZDC	X-Riser - 3/4" MPT x 1/2" CTS x 36" OAL
LP-XR-10B-12-72-L-ZDC	X-Riser - 3/4" MPT x 1/2" CTS x 72" OAL
LP-XR-10B-8SN-36-L	X-Riser - 1/2" FML FLR Swivel x 1/2" CTS x 36" OAL
LP-XR-10B-8SN-72-L	X-Riser - 1/2" FML FLR Swivel x 1/2" CTS x 72" OAL
LP-XR-10B-8SN-96-L	X-Riser - 1/2" FML FLR Swivel x 1/2" CTS x 96" OAL
LP-XR-17C-10SN-36-L	X-Riser - 5/8" FML FLR Swivel x 3/4" IPS x 36" OAL
LP-XR-17C-10SN-72-L	X-Riser - 5/8" FML FLR Swivel x 3/4" IPS x 72" OAL
LP-XR-17C-10SN-96-L	X-Riser - 5/8" FML FLR Swivel x 3/4" IPS x 96" OAL
LP-A597-10-8-SW	Flare-Head Service 1/2" FF



Delivering solutions to fuel and feed the world.

800-437-9702 | feiinc.com